


R FORMU OVAL VE OCTAGONAL CONTA ÖLÇÜ TABLOSU

NOMİNAL ÇAP (inches)	lb	RING NO	Dm	B	h	H1
1/2"	300/900	R11	34,13	6,35	11,17	9,65
1/2"	1500	R12	39,7	7,95	14,22	12,7
1/2"	2500	R13	42,87	7,95	14,22	12,7
3/4"	300/600	R13	42,87	7,95	14,22	12,7
3/4"	1500	R14	44,45	7,95	14,22	12,7
1"	150	R15	47,62	7,95	14,22	12,7
3/4"	2500	R16	50,8	7,95	14,22	12,7
1"	300/600/1500	R16	50,8	7,95	14,22	12,7
1.1/4"	150	R17	57,15	7,95	14,22	12,7
1"	2500	R18	60,32	7,95	14,22	12,7
1.1/4"	300/600/1500	R18	60,32	7,95	14,22	12,7
1.1/2"	150	R19	65,10	7,95	14,22	12,7
1.1/2"	300/600/1500	R20	68,27	7,95	14,22	12,7
1.1/4"	2500	R21	72,23	11,12	17,52	16,00
2"	150	R22	82,55	7,95	14,22	12,7
1.1/2"	2500	R23	82,55	11,12	17,52	16,00
2"	300/600	R23	82,55	11,12	17,52	16,00
2"	1500	R24	95,25	11,12	17,52	16,00
2.1/2"	150	R25	101,6	7,95	14,22	12,7
2"	2500	R26	101,6	11,12	17,52	16,00
2.1/2"	300/600	R26	101,6	11,12	17,52	16,00
2.1/2"	1500	R27	107,95	11,12	17,52	16,00
2.1/2"	2500	R28	111,12	12,7	19,05	17,52
3"	150	R29	114,3	7,95	14,22	12,7
3"		R30	117,47	11,12	17,52	16,00
3"	300/600/900	R31	123,82	11,12	17,52	16,00
3"	2500	R32	127,00	12,7	19,05	17,52
3.1/2"	150	R33	131,77	7,95	14,22	12,7
3.1/2"	300/600	R34	131,77	11,12	17,52	16,00
3"	1500	R35	136,52	11,12	17,52	16,00
4"	150	R36	149,22	7,95	14,22	12,7
4"	300/400/600/900	R37	149,22	11,12	17,52	16,00
4"	2500	R38	157,17	15,87	22,35	20,57
4"	1500	R39	161,92	11,12	17,52	16,00
5"	150	R40	171,45	7,95	14,22	12,7
5"	300/400/600/900	R41	180,97	11,12	17,52	16,00
5"	2500	R42	190,5	19,05	25,4	23,87
6"	150	R43	193,67	7,95	14,22	12,7
5"	1500	R44	193,67	11,12	17,52	16,00

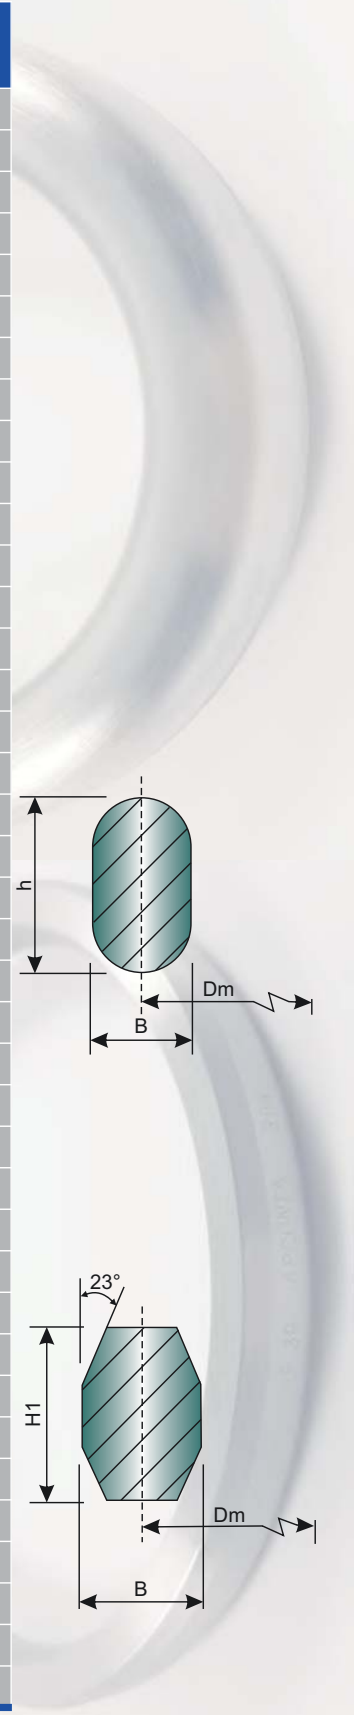

R FORMU OVAL VE OCTAGONAL CONTA ÖLÇÜ TABLOSU

NOMİNAL ÇAP inches	lb	RING NO	Dm	B	h	H1
6"	300/400/600/900	R45	211,15	11,12	17,52	16,00
6"	1500	R46	211,15	12,7	19,05	17,52
6"	2500	R47	228,6	19,05	25,4	23,87
8"	150	R48	247,65	7,95	14,22	12,7
8"	300/400/600/900	R49	269,87	11,12	17,52	16,00
8"	1500	R50	269,87	15,87	22,35	20,57
8"	2500	R51	279,4	22,22	28,7	26,92
10"	150	R52	304,8	7,95	14,22	12,7
10"	300/400/600/900	R53	323,85	11,12	17,52	16,00
10"	1500	R54	323,85	15,87	22,35	20,57
10"	2500	R55	342,9	28,57	36,57	35,05
12"	150	R56	381,0	7,95	14,22	12,7
12"	300/400/600/900	R57	381,0	11,12	17,52	16,00
12"	1500	R58	381,0	22,22	28,7	26,92
14"	150	R59	396,87	7,95	14,22	12,7
12"	2500	R60	406,4	31,75	39,62	38,1
14"	300/400/600	R61	419,1	11,12	17,52	16,00
14"	900	R62	419,1	15,87	22,35	20,57
14"	1500	R63	419,1	25,4	33,27	31,75
16"	150	R64	454,02	7,95	14,22	12,7
16"	300/400/600	R65	469,9	11,12	17,52	16,00
16"	900	R66	469,9	15,87	22,35	20,57
16"	1500	R67	469,9	28,57	36,57	35,05
18"	150	R68	517,52	7,95	14,22	12,7
18"	300/400/600	R69	533,4	11,12	17,52	16,00
18"	900	R70	533,4	19,05	25,4	23,87
18"	1500	R71	533,4	28,57	36,57	35,05
20"	150	R72	558,8	7,95	14,22	12,7
20"	300/400/600	R73	584,2	12,7	19,05	17,52
20"	900	R74	584,2	19,05	25,4	23,87
20"	1500	R75	584,2	31,75	39,62	38,1
24"	150	R76	673,1	7,95	14,22	12,7
24"	300/400/600	R77	692,15	15,87	22,35	20,57
24"	900	R78	692,15	25,4	33,27	31,75
24"	1500	R79	692,15	34,92	44,45	41,40
22"	150	R80	615,95	7,95	14,22	12,7
22"	300/400/600	R81	635,0	14,30	19,05	19,05
26"	300/400/600	R93	749,3	19,05	23,87	23,87
26"	900	R100	749,3	28,57	35,05	35,05
28"	300/400/600	R94	800,1	19,05	23,87	23,87
28"	900	R101	800,1	31,75	38,1	38,1
30"	300/400/600	R97	965,2	22,22	26,92	26,92
30"	900	R102	857,25	31,75	38,1	38,1

